




# INDUSTRIAL AIR CURTAINS

## COR-IND M Series

**NEW**

COR-IND M

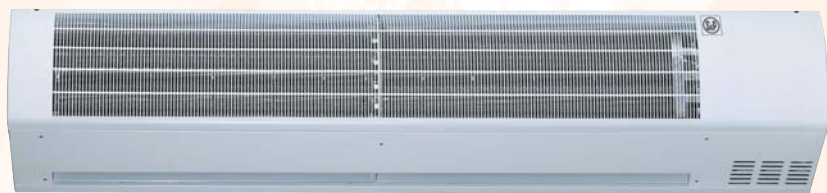

Designed for wall application in commercial or industrial environments.

**Characteristics:**

High performance tangential impeller giving a low sound level.


Can be installed in series.

Available in ambient or ambient and hot air versions.

For installation at heights from 4 to 6 m.

**Ease of installation**

Air curtains

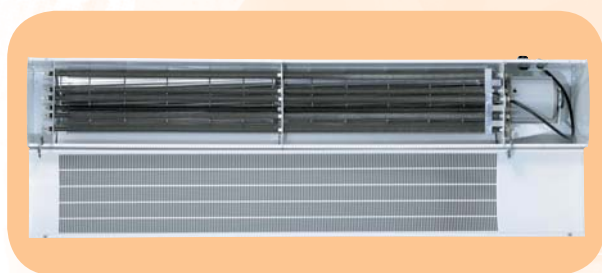



Fitted with a removable cover up to 180° by means of a set of hinges to ease the wiring.

Warehouses

**Applications:** see page BASIC CONCEPTS AIR CURTAINS.



**Dimensions (mm)**

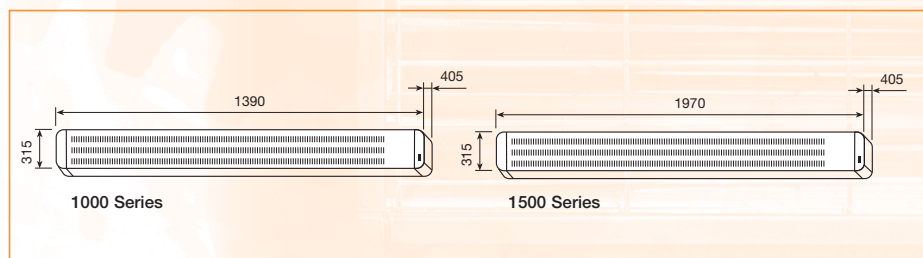

Air distance/speed

**Accessories**



Remote control model	Air curtain model
CR-20	COR-IND M 1000 F
	COR-IND M 1500 F
CR-30	COR-IND M 1000/12
	COR-IND M 1500/18


Dimensions CR-20 / CR-30

LxAxH (mm): 80x57x120

Each remote unit can control up to 5 units of the same model in series.

The combinations of the following models can be controlled with a single remote control: COR-IND M-1000 F with COR-IND M-1500 F.

CR-20 and CR-30 remote control unit



Installation height

**Technical characteristics**

Model	Voltage (50 Hz) (V)	Heat power (kW)	Motor power (W)	Speeds	Airflow (m³/h)		output speed* (m/s) at 0,05 m	Maximum ØT (°C)				Sound pressure level** (dB(A))	Abs. current (A)	Thermal fuse	Ambient / Hot air	Weight (Kg)	Colour
					High	Low		Max. Power		Min. Power							
								High s.	Low s.	High s.	Low s.						
COR-IND M 1000 F	230	•	267	2	3400	3037	12,84	•	•	•	•	55	1,2	•	F	40	White RAL 9003
COR-IND M 1500 F	230	•	381	2	4849	4071	14,1	•	•	•	•	59	1,76	•	F	50	White RAL 9003
COR-IND M 1000/12	3N 400	6 / 12	245	2	3212	2489	12,13	17,7	22,8	8,34	10,57	55	1,07	•	F/C	45	White RAL 9003
COR-IND M 1500/18	3N 400	9 / 18	348	2	4955	4375	18,5	12,38	23,34	9,64	11,23	59	1,62	•	F/C	45	White RAL 9003

\* Maximum air speed.

\*\* Measured at 5 m distance, at open air.