




# INDUSTRIAL AIR CURTAINS

## COR-IND Series

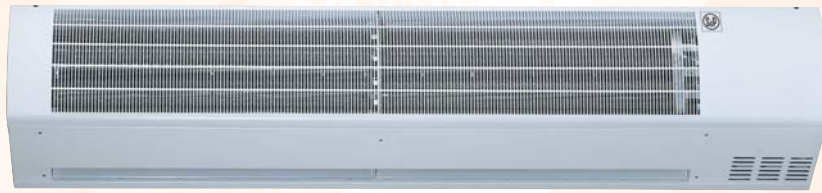

Designed for wall application in commercial or industrial environments.

### Characteristics:

High performance tangential propeller/impeller giving a low sound level.

Can be installed in series.

Available in ambient or ambient and hot air versions.

For installation at heights from 6 to 10 m.

### Ease of installation




Fitted with a removable cover up to 180° by means of a set of hinges to ease the wiring.



Warehouses





**Applications:** see page BASIC CONCEPTS AIR CURTAINS.



Air distance/speed

### Dimensions (mm)

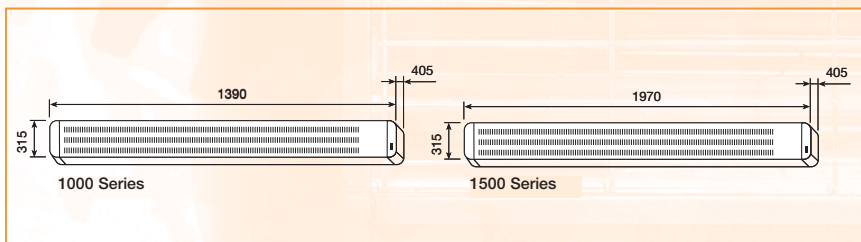

Installation height

### Accessories



Remote control model	Air curtain model
CR-20	COR-IND 1000 F
	COR-IND 1500 F
CR-30	COR-IND 1000/18 COR-IND-1000/24
	COR-IND 1500/24 COR-IND-1500/36

Dimensions CR-20 / CR-30

LxH (mm): 80x57x120

Each remote unit can control up to 5 units of the same model in series.

The combinations of the following models can be controlled with a single remote control: COR-IND 1000 F with COR-IND 1500 F.

CR-20 and CR-30 remote control unit

### Technical characteristics

Model	Voltage (50 Hz) (V)	Heat power (kW)	Motor power (W)	Speeds	Airflow (m <sup>3</sup> /h)		Outout speed* (m/s) at 0,05 m	Maximum ØT (°C)				Sound pressure level** (dB(A))	Abs. current (A)	Thermal fuse	Ambient/ Hot air	Weight (kg)	Colour
					High	Low		Max. Power		Min. Power							
							High s.	Low s.	High s.	Low s.							
COR-IND 1000 F	230	•	850	2	4500	3600	20					57	4		A	40	White RAL 9003
COR-IND 1500 F	230	•	1300	2	6500	5800	20					61	6		A	50	White RAL 9003
COR-IND 1000/18	3N 400	9 / 18	660	2	4250	3800	20	12,5	14	6,5	7	57	27	•	A / H	45	White RAL 9003
COR-IND 1000/24	3N 400	12 / 24	660	2	4250	3800	20	17	19	8,5	9,5	57	38	•	A / H	45	White RAL 9003
COR-IND 1500/24	3N 400	12 / 24	1200	2	6900	6300	20	10,5	11,5	5,5	6	61	38	•	A / H	55	White RAL 9003
COR-IND 1500/36	3N 400	18 / 36	1200	2	6900	6300	20	15,5	17	8	8,5	61	58		A / H	55	White RAL 9003

\* Maximum speed.

\*\* Measured at 5 m distance, at open air.