



HAA

Particulate Filter

Description

The HAA type particulate filters are designed for applications in operating rooms, clean rooms and hygienic ambiances in textile industry. They are suitable for wall or duct installations.

Properties

The HAA type particulate filters hold the particulates in the extracted air and prevent them to enter the ducts. The filter element can easily be removed by opening the cover. The filter conforms with DIN 4185 norm, related with textile products. The whole unit is made from stainless steel. The cover is secured by screwed knobs or triangular socket locks.

Materials

The main casing is manufactured from Cr-Ni steel. The filter element is from 0.5 x ϕ 0.3 mm Cr-Ni steel.


Surface Treatment

The whole unit is made from Cr-Ni materials.


Dimensions

Standard Dimensions

C_E (mm)	C_B (mm)
300	200
400	300
500	400
600	500
700	
800	
900	

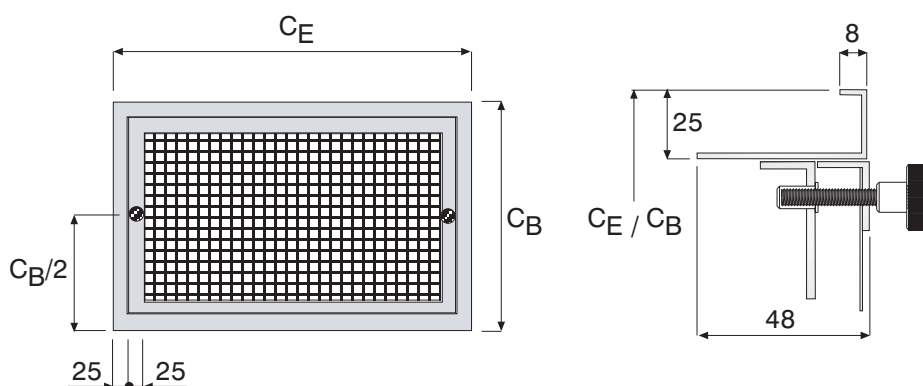

Installation

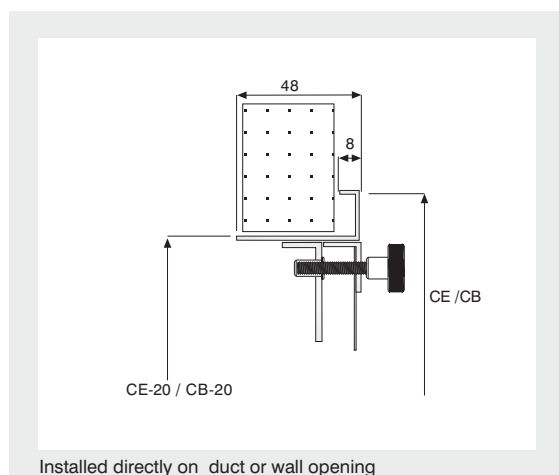

Specification Text

Particulate filter; to be used in clean and hygienic rooms. The filter will be suitable for installation in walls and ducts. The filter frame will be formed from Cr-Ni steel sheets and the filter will be made from 0.5 x ϕ 0.3 mm Cr-Ni steel mesh.

The filter will be easily removable by utilizing screwed knobs or triangular socket locks.

Order Code

Model		HAA.25.AA.00 -500 x300	
Frame	25 mm		C _E / C _B (mm) Refer to page 2
Accessories	AA..Metal screwed knobs AB..Triangular socket locks		
Installation	00...Without screw holes 10...With screw holes		
		Standard Dimensions	

H

HAA

**Particulate
Filter**

KES KLİMA

INDUSTRIAL AND TRADE CO.
Uzay Çağı Caddesi No:10
06370 Östim/ANKARA
Phone: +90.312.385 76 57
Fax : +90.312.354 12 31
www.kesklima.com



TÜV Rheinland Group



DIN EN ISO 9001:2000
Zertifikat: 01 100 042854