WINDOW CURTAINS

COR-S Series



The air curtains of the range S are especially designed to be installed in reduced spaces to create a barrier between two different areas. Because of the volume/power ratio, they also fulfill a purpose as a heating element.


The range S is made up of two models of 4 and 6 kW respectively, both with two heating powers, two speeds and ambient thermostat. They can also work at two speeds without heating.

They create an effective barrier up to a distance of 1.5 m.

The installation of this type of air curtain is recommended in cases such as kiosk windows, service windows that must be opened to assist the public, windows which, due to differences in temperature, have a tendency to steam up and make exterior vision difficult. Model COR-6-900 S includes a remote control unit.




Air distance/speed COR-S



Height installation COR-S

Dimensions (mm)

NEW

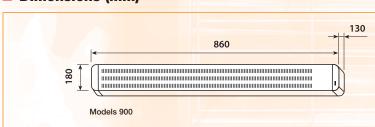



Power heating selector and thermostat COR-4-900 S

	Voltage (50 Hz)	Heat power	Motor power	Speeds	Airflow (m³/h)		Outlet speed (m/s) at 0,05 m		Maximum ØT (°C)				Absorbed current	Thermal fuse	Ambient/ Hot air	Remote control	Weight	Colour
					Speeds		Speeds		Potencia máx.		Potencia mín.							
Model	(V)	(kW)	(W)		high	low	high	low	High s.	Low s.	High s.	Low s.	(A)				(kg)	
COR-4-900 S	230	2/4	30,5	2	409	316	4,4	3,4	47	60	23,5	28	18	•	A/H		7,15	White RAL 900
COR-6-900 S	400 V + N 230V 3 phase 230V single ph.	3/6	30,5	2	409	316	4,4	3,4	89	100	41	45	9 / 15 / 26	•	A/H	•	7,5	White RAL 900

Technical characteristics

728

COR-S